

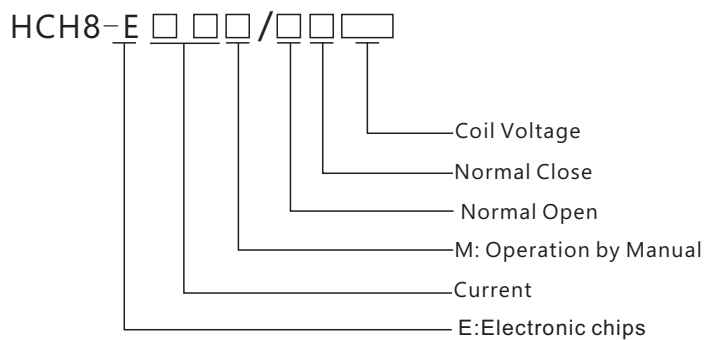



4 AC/DC24V-AC/DC240V Modular contactor



(eg. HCH8-E25/20 AC230V, It is 25A, 2NO, 230V AC current coil voltage with electronic chips)



Contactor Model	Ie		Uc (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
HCH8-E32/20	32A	12A	24 36 18-40	
HCH8-E40/20	40A	18A		
HCH8-E63/20	63A	25A		
HCH8-E32/11	32A	12A	24 36 18-40	
HCH8-E40/11	40A	18A		
HCH8-E63/11	63A	25A		
HCH8-E32/02	32A	12A	24 36 18-40	
HCH8-E40/02	40A	18A		
HCH8-E63/02	63A	25A		

HCH8 Modular contactor



AC/DC 4P,2modules

Contactor Model	Ie		Uc (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
HCH8-E16/40	16A	6A	24 36 18-40	
HCH8-E20/40	20A	7A		
HCH8-E25/40	25A	9A		
HCH8-E16/04	16A	6A	24 36 18-40	
HCH8-E20/04	20A	7A		
HCH8-E25/04	25A	9A		
HCH8-E16/22	16A	6A	24 36 18-40	
HCH8-E20/22	20A	7A		
HCH8-E25/22	25A	9A		
HCH8-E16/31	16A	6A	24 36 18-40	
HCH8-E20/31	20A	7A		
HCH8-E25/31	25A	9A		



AC/DC 4P,3modules

Contactor Model	Ie		Uc (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
HCH8-E32/40	32A	12A	24 36 18-40	
HCH8-E40/40	40A	18A		
HCH8-E63/40	63A	25A		
HCH8-E32/04	32A	12A	24 36 18-40	
HCH8-E40/04	40A	18A		
HCH8-E63/04	63A	25A		
HCH8-E32/22	32A	12A	24 36 18-40	
HCH8-E40/22	40A	18A		
HCH8-E63/22	63A	25A		
HCH8-E32/31	32A	12A	24 36 18-40	
HCH8-E40/31	40A	18A		
HCH8-E63/31	63A	25A		



AC/DC 2P,2modules

Contactor Model	Ie		Uc (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
HCH8-E32M/20	32A	12A	24	
HCH8-E40M/20	40A	18A	36	
HCH8-E63M/20	63A	25A	18-40	
HCH8-E32M/11	32A	12A	24	
HCH8-E40M/11	40A	18A	36	
HCH8-E63M/11	63A	25A	18-40	
HCH8-E32M/02	32A	12A	24	
HCH8-E40M/02	40A	18A	36	
HCH8-E63M/02	63A	25A	18-40	

AC/DC 4P,2modules



Contactor Model	Ie		Uc (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
HCH8-E16M/40	16A	6A	24	
HCH8-E20M/40	20A	7A	36	
HCH8-E25M/40	25A	9A	18-40	
HCH8-E16M/04	16A	6A	24	
HCH8-E20M/04	20A	7A	36	
HCH8-E25M/04	25A	9A	18-40	
HCH8-E16M/22	16A	6A	24	
HCH8-E20M/22	20A	7A	36	
HCH8-E25M/22	25A	9A	18-40	
HCH8-E16M/31	16A	6A	24	
HCH8-E20M/31	20A	7A	36	
HCH8-E25M/31	25A	9A	18-40	

HCH8 Modular contactor



4P,3modules

Contactor Model	Ie		Uc (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
HCH8-E32M/40	32A	12A	24 36 18-40	
HCH8-E40M/40	40A	18A		
HCH8-E63M/40	63A	25A		
HCH8-E32M/04	32A	12A	24 36 18-40	
HCH8-E40M/04	40A	18A		
HCH8-E63M/04	63A	25A		
HCH8-E32M/22	32A	12A	24 36 18-40	
HCH8-E40M/22	40A	18A		
HCH8-E63M/22	63A	25A		
HCH8-E32M/31	32A	12A	24 36 18-40	
HCH8-E40M/31	40A	18A		
HCH8-E63M/31	63A	25A		



Modular Contactor AC/DC power consumption

Poles	Ie		Uc (V AC/DC)(50Hz)	Power consumption	
	AC-7a	AC-7b		Hold on	Pull in
2P	32A	12A	24	0.91VA	36.72VA
	40A	18A	24	0.91VA	36.72VA
	63A	25A	24	0.91VA	36.72VA
4P	16A	6A	24	0.91VA	36.72VA
	20A	7A	24	0.91VA	36.72VA
	25A	9A	24	0.91VA	36.72VA
	32A	12A	24	1.22VA	58.44VA
	40A	18A	24	1.22VA	58.44VA
	63A	25A	24	1.22VA	58.44VA